
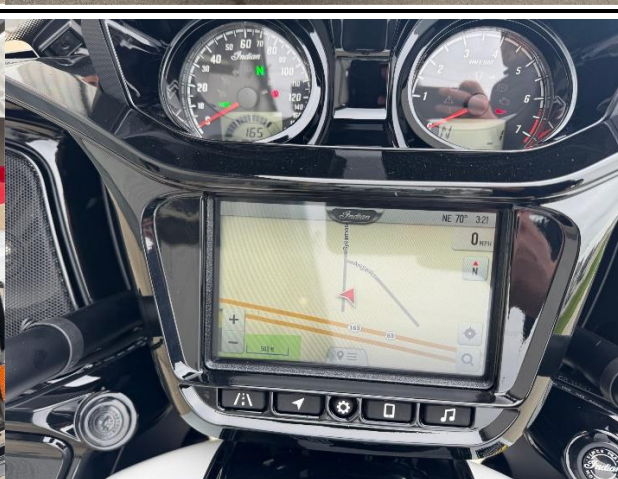


2025 Indian Motorcycle Challenger Elite Price in Kaliningrad is 3 550 000P

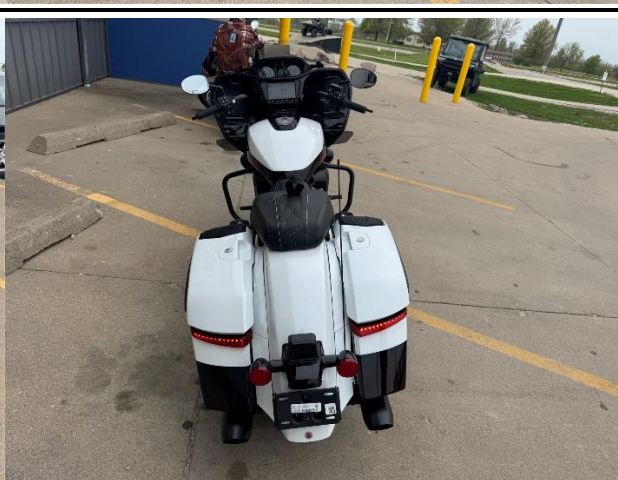

Condition	New
Model Year	2025
Manufacturer	Indian Motorcycle
Model	Challenger Elite
Category	Bagger
VIN	56KLCESS4S3437253
Color	White Crystal with Black Candy / Red Candy / Gloss Black

Brakes/Wheels/Tires

Brakes	Front - Brembo® Calipers, Dual Semi-Floating Rotors - 320 x 5.0 mm Rear - Single Floating Rotor - 298 x 7.0 mm ABS
Wheels	Front - 5-Spoke Machined Cast 19 x 3.5 in. Rear - 5-Spoke Machined Cast 16 x 5 in.
Tires	Front - Metzeler® Cruisetec® 130 / 60B19 66H Rear - Metzeler® Cruisetec® 180 / 60R16 80H

Dimensions

Length	Overall - 98.5 in. (2,503 mm)
Height	Overall - 48.7 in. (1,237 mm)
Width	Overall - 41.9 in. (1,063 mm)
Weight	As shipped - 828 lb. (376 kg) Running order - 864 lb. (392 kg) GVWR - 1,385 lb. (628 kg)
Ground Clearance	5.4 in. (137 mm) Lean angle - 31°
Wheelbase	65.7 in. (1,668 mm)
Seat Height	26.5 in. (672 mm)

Drivetrain

Primary Drive	Gear Drive Wet Clutch
Final Drive	2.379:1

Electrical

Instrumentation	Gauges - Fairing-mounted instrument cluster featuring analog speedometer and tachometer with fuel gauge, range, odometer and current gear. 15 LED telltale indicators - cruise control enabled, cruise control set, neutral, high beam, turn signal, ABS, check engine, low tire pressure, battery, low fuel, security system, low engine oil pressure and MPH or km/h unit designation Infotainment - A 7 in. Display Powered by RIDE COMMAND with Customizable Gauge Screens, Bluetooth® Connectivity, AM/FM Radio, Selectable Ride Modes, and More, Factory-Installed RIDE COMMAND+ Telecommunications Unit (TCU) for One-Year FREE Provides Turn-by-Turn GPS Navigation, Live Weather and Traffic Overlays, Apple CarPlay®, Bike Health, Bike Locator, Intuitive Destination Search, and More Audio - Includes 2 100W fairing speakers, 2 - 100W saddlebag speakers. 400W total
Lighting	LED headlamp / Tail / Brake / Turn signal, Saddlebag accent lights

Engine

Engine	PowerPlus
Cooling	Liquid
Horsepower	126 hp
Displacement	1,834 cc (112 ci)
Bore x Stroke	4.33 x 3.80 in. (110 x 96.5 mm)
Compression Ratio	11.4:1
Gear Ratio	1st - 10.169:1
	2nd - 6.933:1
	3rd - 5.151:1
	4th - 4.105:1
	5th - 3.508:1
	6th - 3.017:1
Clutch	Wet, Multi-Plate, Assist
Fuel System	Closed loop fuel Injection / 52 mm dual bore
Exhaust	Split with Resonator
Fuel Capacity	6.0 gal. (22.7 l)
Peak Torque	133 ft. lb. @ 3,600 rpm

Operational

Front Suspension	Inverted Telescopic Fork Travel - 5.1 in. (130 mm)
Rear Suspension	Single Shock with E- Preload Adjustment Travel - 4.5 in. (114 mm)
Rake	25°
Trail	5.9 in. (150 mm)
Fork	Front Tube Diameter - 43 mm